


Precision Clamp on Flexible Rogowski coil CT

JRFS-XXX-M/P (X-XXX) Series

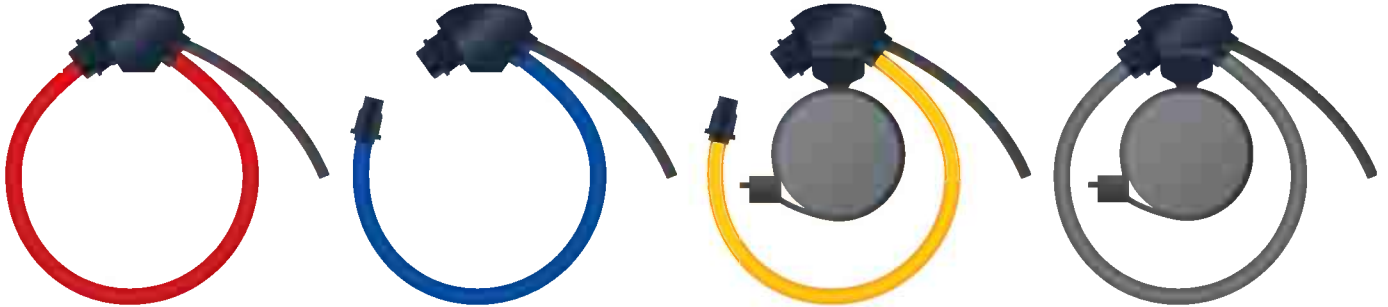

Clamp-on Flexible Rogowski coil Current Transducer has been designed for accurate measurement of AC current with a safe output voltage RMS. JRFS-XXX-M/P/R/U (X-XXX) series is the precision current probe for Revenue-Grade Distribution transformer monitoring. With voltage integrator configuration, it can replace the existing CT directly.

APPLICATIONS

- Revenue-Grade distribution transformer monitoring
- Energy sub-meters
- Power meters
- Power quality monitoring
- Condition monitoring
- Distributed measurement systems

FEATURES


- AC current probe utility by the Rogowski principle
- Flexible and lightweight
- Easy & quick installation in uninterruptible power line
- Insulation CATIII 1000V, IV 600V
- Certificated for UL & CE complying with IEC 61010-1
- Optional size is available from ID 75 to 115mm. (ex. ID 80mm)

SPECIFICATION


Model	JRFS-080X JRFS-075X	JRFS-115X JRFS-105X
Rated Current	250A ~ 1kA	1kA ~ 2kA
Output Voltage	M Type P Type	104mV(50Hz) [124.8mV(60Hz)] 1kA 35mV(50Hz) [42mV(60Hz)]1kA
Accuracy	< 1%	
Phase Shift	< 1° at 50/60Hz (typical < 0.5°)	
Frequency Range	10Hz to 20kHz	
Output Sensitivity Tolerance	±10% maximum(Uncalibrated)	
Output Sensitivity Tolerance	±0.5% of reading at 25°C (Calibrated)	
Linearity (10% to 100% of range)	±0.2% of reading	
Conductor Position Sensitivity	±2% maximum	
Influence of External Field	±2% maximum	
Working Temp.	-30°C ~ + 60°C	
Storage Temp.	-40°C ~ + 60°C	
Insulation Category	CATIII 1000V / CATIV 600V (PD2-Double Insulation)	
Safety Standards	EN/UL/cUL 61010-1, 61010-2-032	
Testing Voltage	7400V/1min	



DIMENSIONS

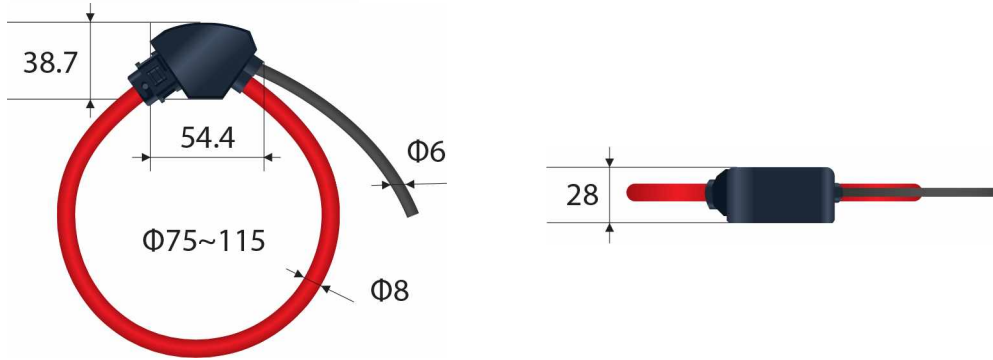

OPTION : INTEGRATOR S/T-XXX SERIES

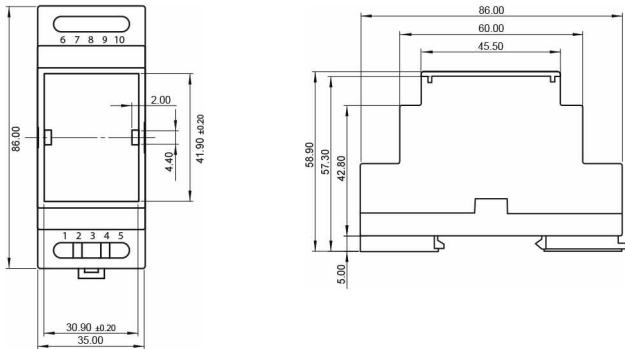


S Series Output : 4-20mADC / 0-5VDC

Output : 4-20mADC / 0-5VDC




Power supply : 24V DC

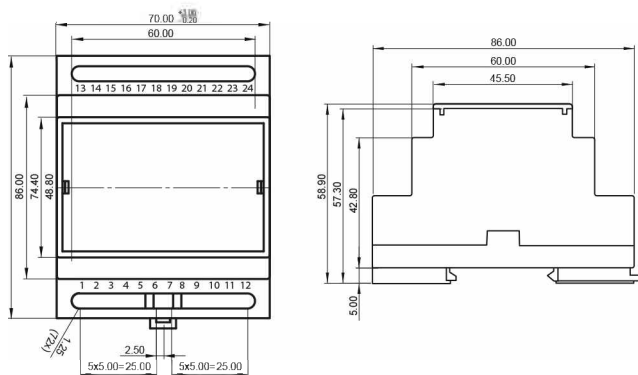

T Series Output : 4-20mADC / 0-5VDC

Output : 4-20mADC / 0-5VDC

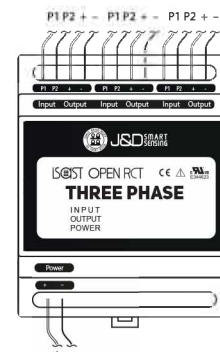

Power supply : 24V DC