
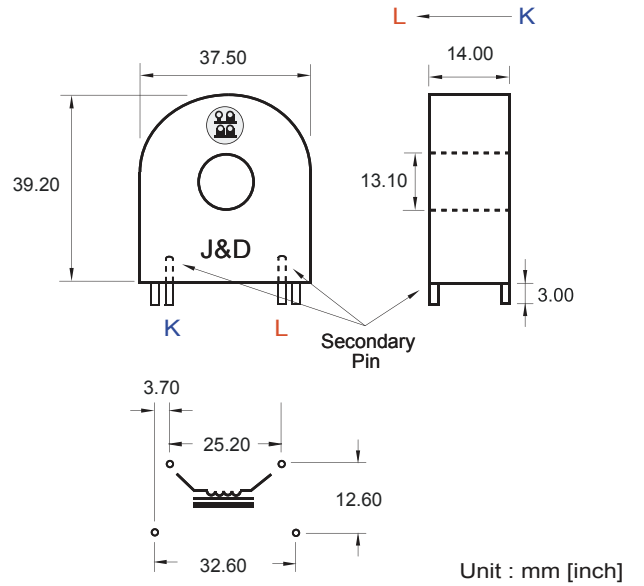


With DC-Tolerance Current Transformer JDTN100V


Dimension >>>>

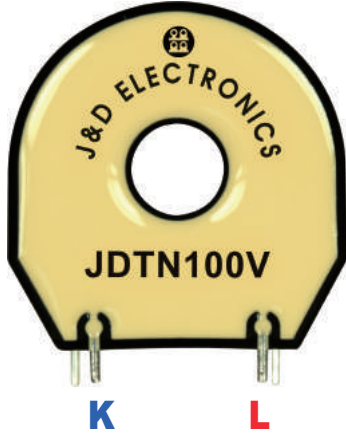

Accuracy conforms to IEC 61869-2,
meets the measuring range from 1 to 120 % of I_n

Model	Primary Current Range		Error Phase $\phi(I)$ [°]	Turns Ratio	Characteristical Value				Terminal Structure	Inner Dia. ϕ
	I _{max} [Arms]	I _{peak} [Aop]			L [H]	R _{cu} [Ω]	R _B [Ω]	U _B [Vrms]		
JDTN100V	100	110	4.08	1:2500	3.1	62	7.5	0.3	Pin	10.8

>>>> Output Voltage Data

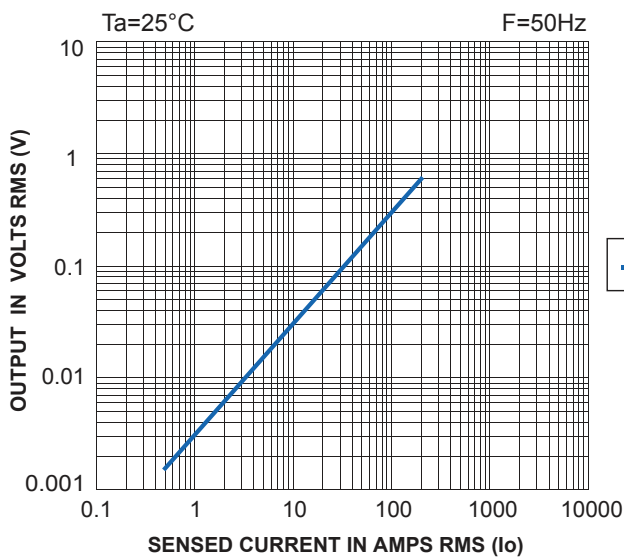

>>>> Temperature Data

